



OMNIE


AI-Powered Robot Floor Cleaner
for High-Dynamic Environments



Key Features

OmniVision

360° camera coverage with 360° object detection and a bird's-eye view for enhanced obstacle avoidance and precise navigation.

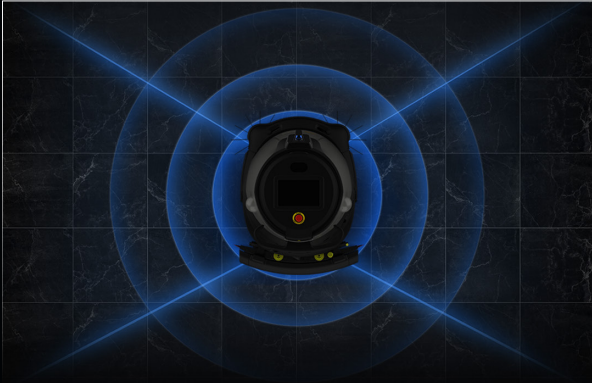

OmniClean

Pre-sweeping FREE*, scrubbing with a wider 520 mm cleaning path while simultaneously swallowing up to 10L trash per hour.

*Available soon.



OmniLiDAR

360° LiDAR coverage, optimized for large highly dynamic industrial environments.



OmniSpotCleaning

Precisely identifying and cleaning both dry and wet waste powered by AI deep learning.



Applicable Flooring Types



Natural Stone




Artificial Stone




Ceramic



Concrete



PVC



Epoxy



Specification*

	Disc Brush	Roller Brush
Net Weight	157 kg 346.1 lb	148 kg 326.3 lb
Cleaning Width	520 mm 20.5 in	406 mm 16 in With side brushes: 780 mm 30.7 in
Max. Cleaning Efficiency (Theoretical)	Scrubbing: 2,621 m ² /h 28,212 ft ² /h Dust Mopping: 3,604 m ² /h 38,793 ft ² /h	Scrubbing: 2,046 m ² /h 22,023 ft ² /h Sweeping: 3,931 m ² /h 42,313 ft ² /h Dust Mopping: 3,604 m ² /h 38,793 ft ² /h
Dimension (L×W×H)	810×700×1,070 mm 31.9×27×42.1 in	
Max. Runtime	Scrubbing 3 h, Dust Mopping 8 h, Sweeping 8 h	
Charging Time	2 h	
Clean/Waste Water Tank	33L / 24 L 8.7 gal / 6.3 gal	
Gradeability	4.6°	
Min. Pass Width	800 mm 31.5 in	
Min. U-turn Width	1,100 mm 43.3 in	
Max. Cleaning Speed	1.4 m/s 3.1 mph	
Sensor System	3D LiDAR, 2D LiDAR, 3D Depth Camera, RGB Camera, Anti-Collision, Anti-Drop	

*Note : [1]The specifications are derived from Gausium lab test results; actual performance data may vary in specific applications.
[2]Alternative configurations compliant with IEC 63327 are available upon request. Please note that the corresponding specifications may vary depending on the chosen configuration.

OMNI **POWER**
FOR A NEXT-LEVEL CLEAN